

DTRACK




Dtrack is 48V modular track system with one circuit of 15A max supply current and second circuit for databus. Versions for surface, suspended and recessed installation available. The recessed version is for plasterboard with thickness of 12.5mm. Tracks are up to 4m length in black or white color.

System includes spotlights for accent lighting and suspended fittings. Modules can be easily installed or reinstalled without tools.

On/Off modules are with On-Board dimmer.

DALI or pushdim versions available.

DTRACK COMBI

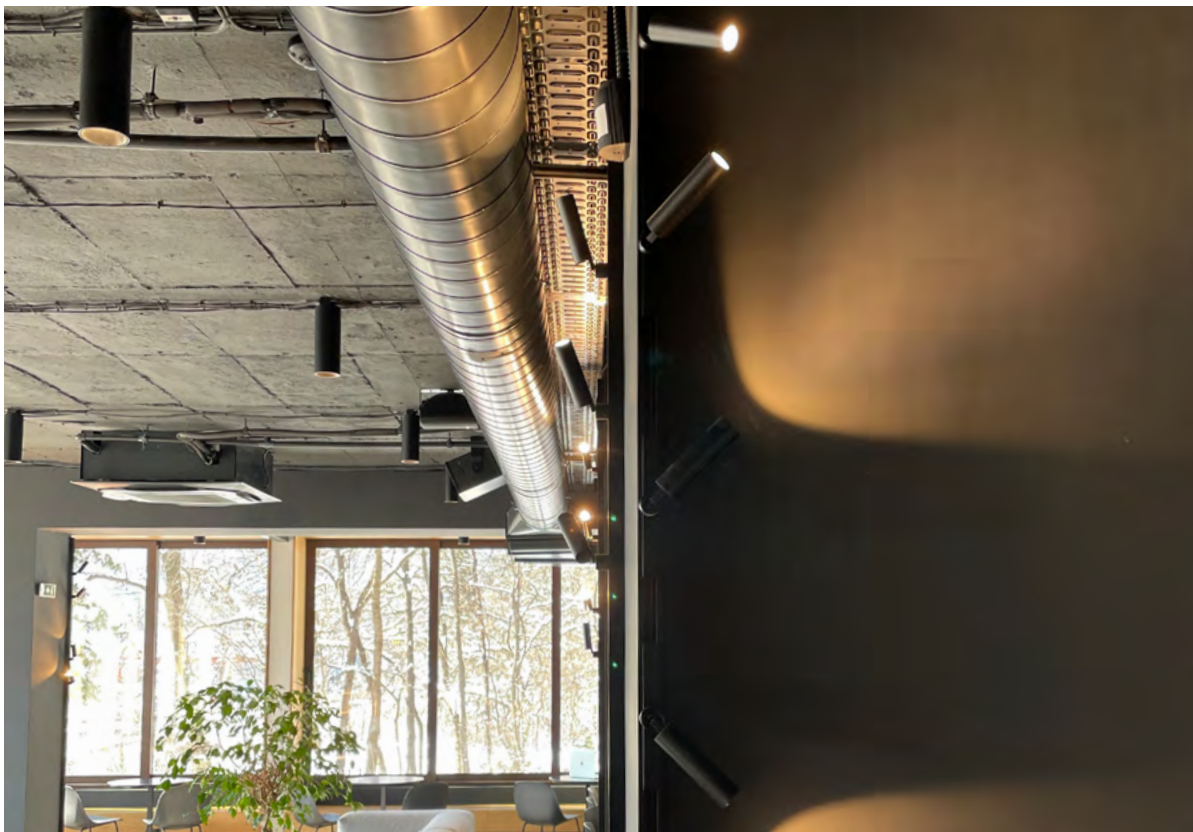



Dtrack Combi is 48V modular track system with one circuit of 15A max supply current and second circuit for databus. Versions for surface, suspended and recessed installation available. The recessed version is for plasterboard with thickness of 12.5mm. Tracks are up to 4m length in black or white color.

System includes spotlights for accent lighting, linear LED lines with opal or darklight optics and suspended fittings. Modules can be easily installed or reinstalled without tools.


On/Off modules are with On-Board dimmer.

DALI or pushdim versions available.


Dtrack Combi trimless

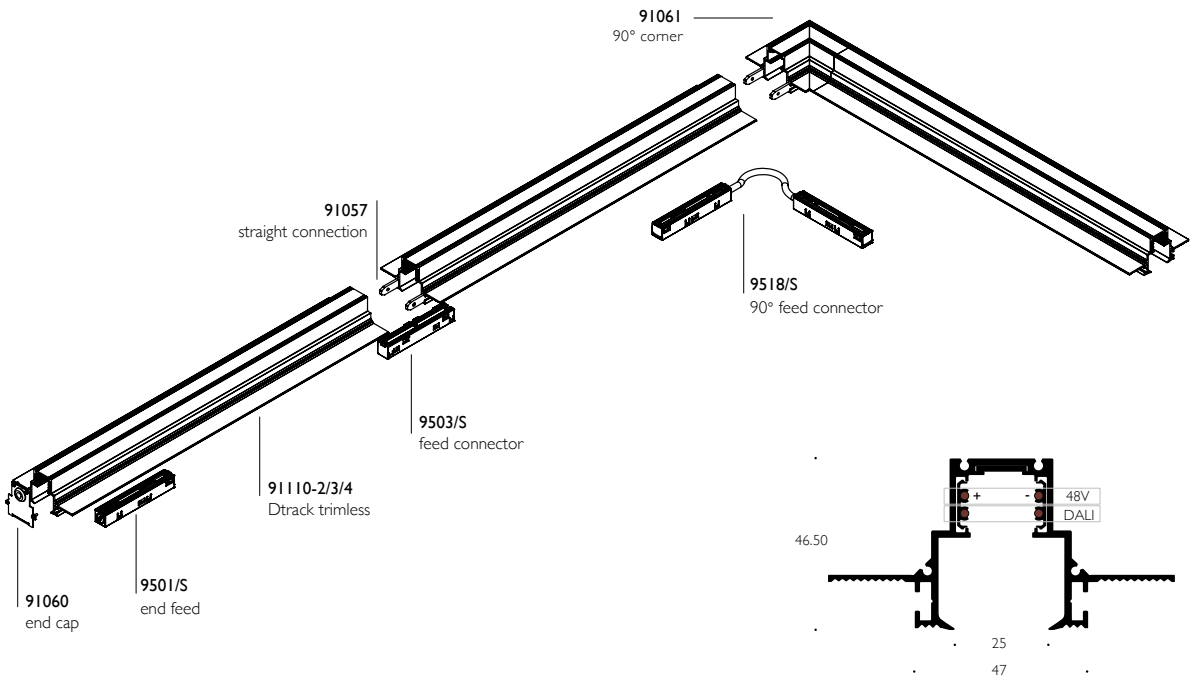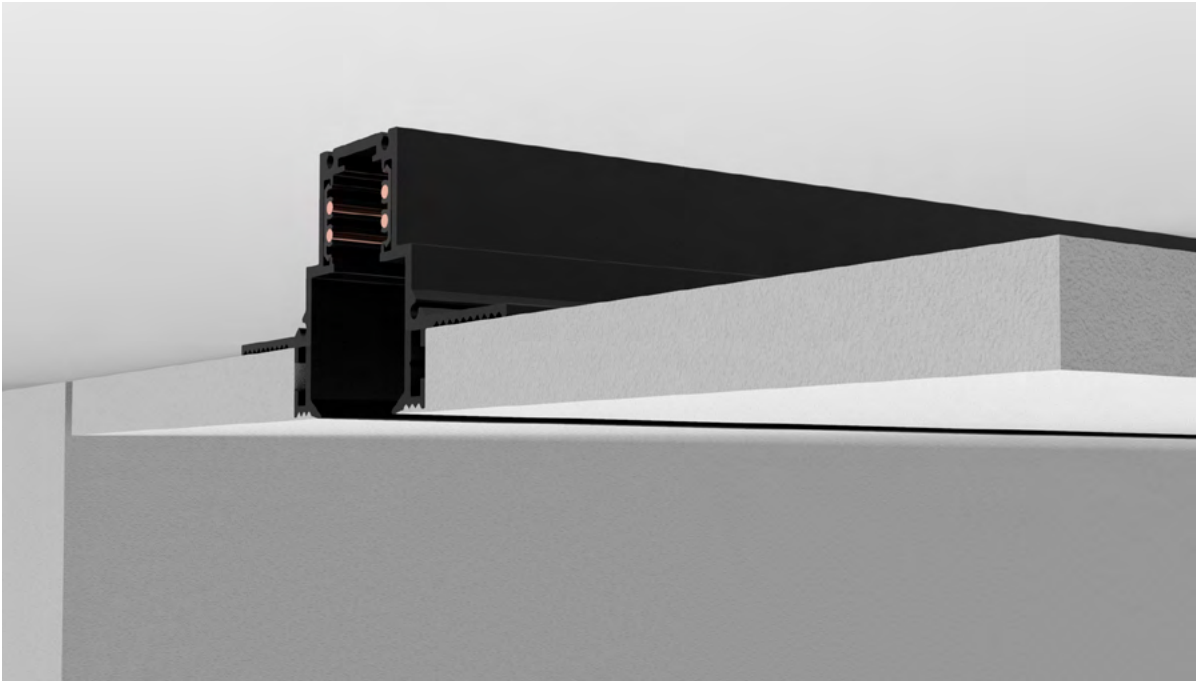

Dtrack Combi Surface

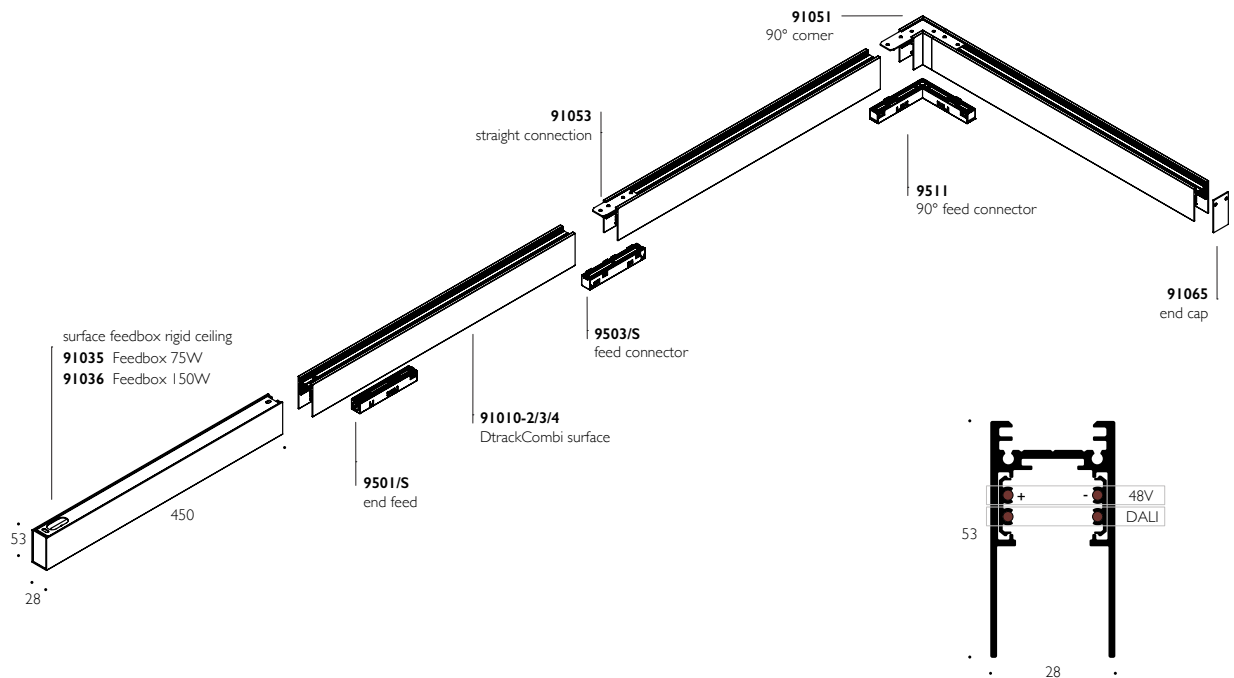

Dtrack Combi Suspension

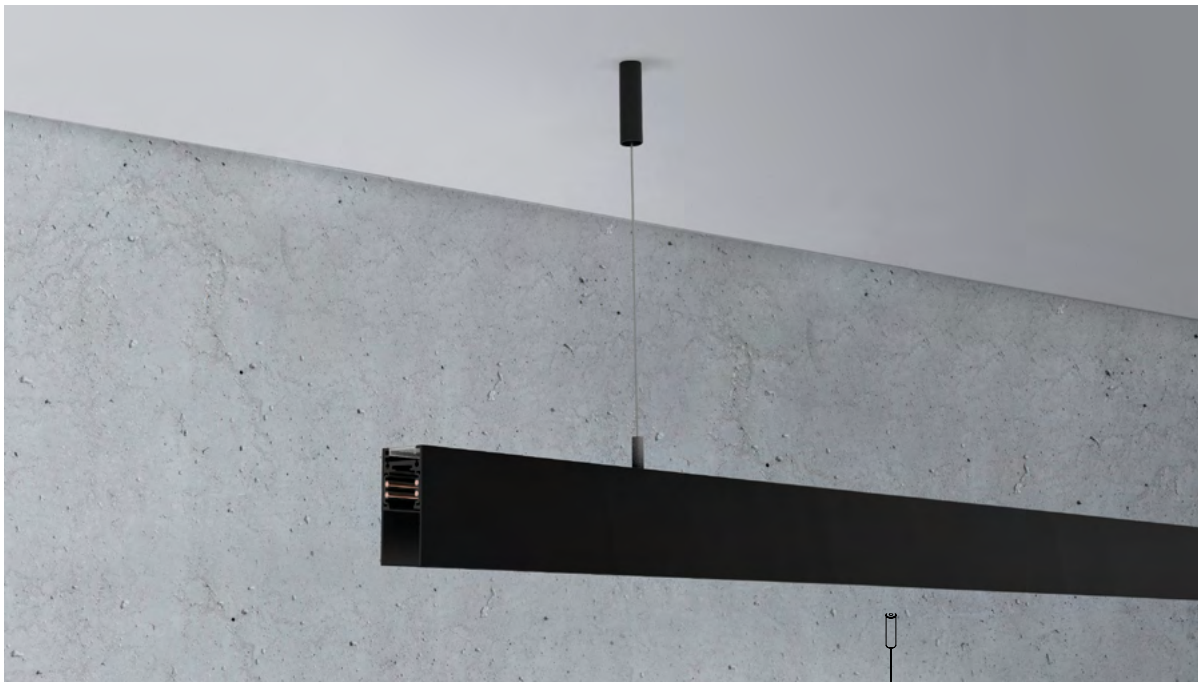

Cable outlets for recessed ceiling with remote driver



00013


00051

00113

00050

Trimless

Trimless

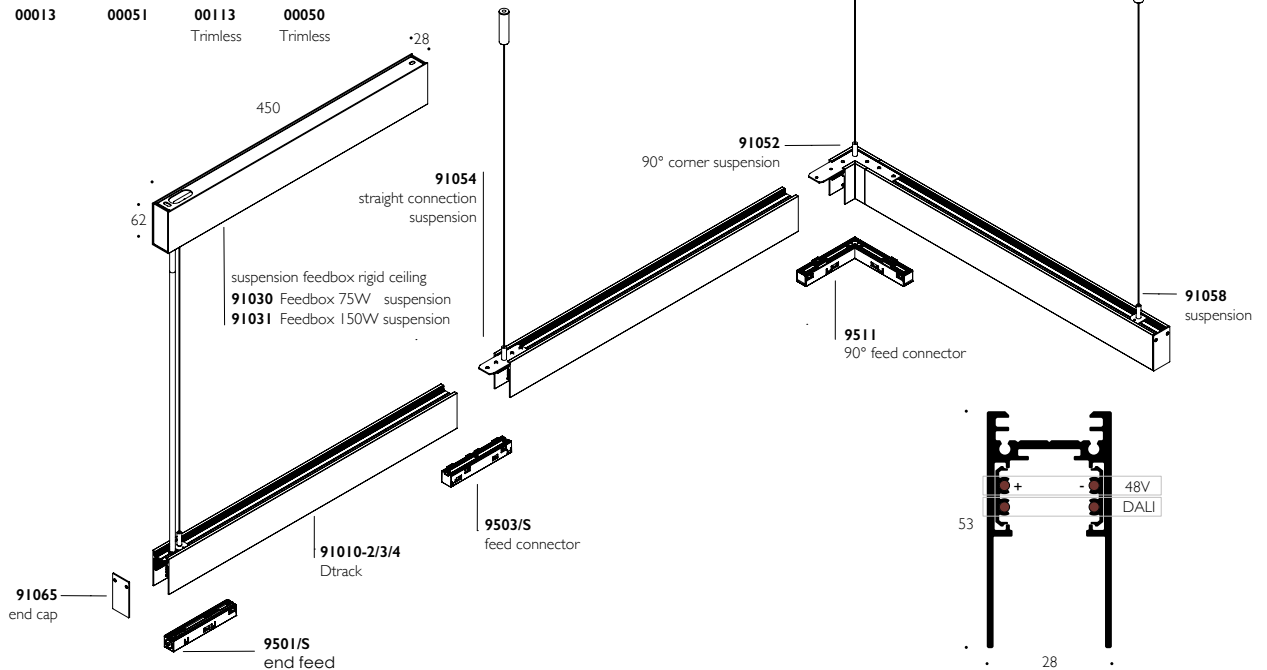



POINTER

DTRACK COMBI



POINTER 30 DTRACK COMBI

POINTER 30 DOUBLE DTRACK COMBI

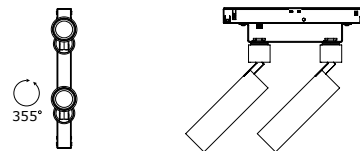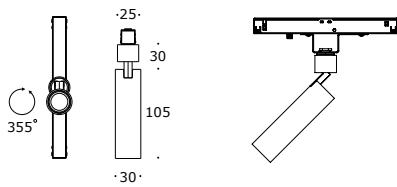

DALI driver available

reference 2412HW/WW/W

led wattage 7 W

 power supply 48 V DC

 lamp COB

 optics 44°

 onboard dim 

DALI driver available

reference 2413HW/WW/W

led wattage 2x7 W

 power supply 48 V DC

 lamp COB



 optics 44°

 onboard dim 



POINTER 60 DTRACK

POINTER 110 DTRACK COMBI

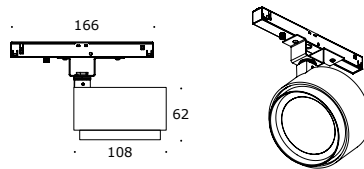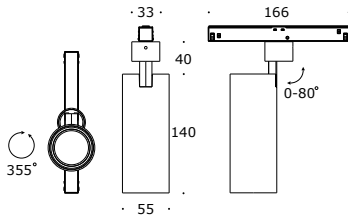

DALI driver available



reference 2417HW/WW/W | 2418HW/WW/W

led wattage 12.9 W

 power supply 48 V DC

 lamp COB

 optics 32° | 16°

 onboard dim 

DALI driver available

reference 2453HW/WW/W | 2454HW/WW/W

led wattage 18 W

 power supply 48 V DC

 lamp COB


 optics 15° | 53°

 onboard dim 


STICK DTRACK



STICK 30 DTRACK COMBI



STICK 60 DTRACK COMBI



DALI driver available

reference	4073HW/WW/W
led wattage	7 W
 power supply	48 V DC
 lamp	COB
 optics	44°
 onboard dim	

DALI driver available

reference	4081HW/WW/W
led wattage	12.9 W
 power supply	48 V DC
 lamp	COB
 optics	32°
 onboard dim	