



LUPO




LUPO Gu10

LUPO GU10 TRIMLESS

2106.XX
2107.XX
2121.XX
2122.XX

LUPO GU10

1. CUT-OUT THE REQUIRED MOUNTING APERTURE IN THE SUSPENDED CEILING.
2. MAKE THE ELECTRICAL CONNECTION.
3. FIX THE BODY TO THE CEILING.
4. UNCLIP THE HEAD BY PULLING IT DOWN FROM THE RING AND INSERT THE BULB.
5. REASSEMBLE THE HEAD.


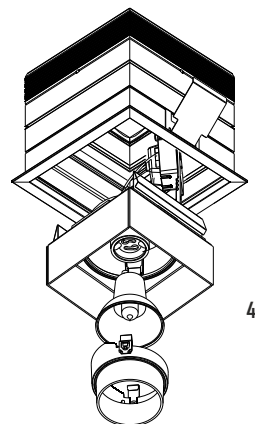
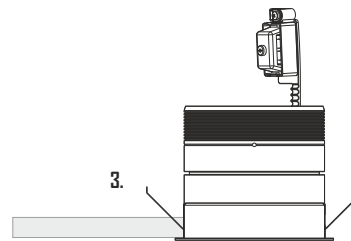
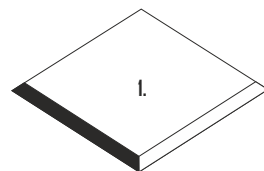


CUT-OUT:

1X1	2006	98x98 mm
2X1	2007	183x98 mm

LUPO GU10 TRIMLESS

1. CUT-OUT THE REQUIRED RECESSING APERTURE AND SCREW THE FRAME TO THE SUSPENDED CEILING.
2. LEVEL THE FRAME SO IT IS FLUSH WITH THE CEILING SURFACE.
3. PLASTER THE GAP BETWEEN THE FRAME AND THE GYPSUM BOARD.
4. MAKE THE ELECTRICAL CONNECTION AND INSERT THE BODY INTO THE FRAME.
5. UNCLIP THE HEAD BY PULLING IT DOWN FROM THE RING AND INSERT THE BULB.
6. REASSEMBLE THE HEAD.

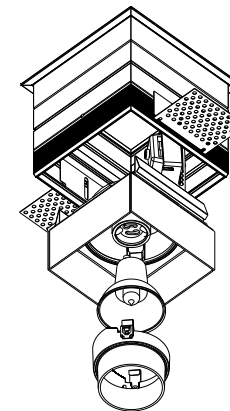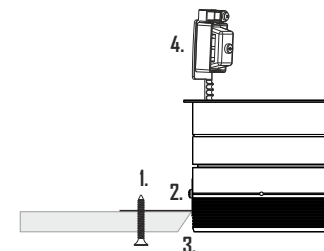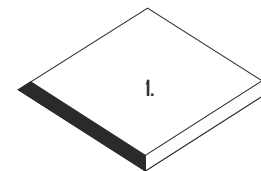

CUT-OUT:
NOT ACCESSIBLE
CEILING

1X1	2121	110x98 mm
2X1	2122	183x98 mm

CUT-OUT:
ACCESSIBLE
CEILING

98x98 mm
183x98 mm

DEKKO

12-16 DRAGAN TSANKOV BLVD
1164 SOFIA,
BULGARIA

T +359 (0)2 8168116
F +359 (0)2 8168118

office@dekko.net
www.dekko.net