












# OREOL SURFACE




OREOL is available in 8 sizes and can be surface suspended or wall/ceiling mounted. It consists of circular aluminium profile and an acrylic diffuser for uniform illumination.

Integrated or remote control gear that can be fixed or touch/DALI dimmable. Can be ordered in IN or OUT versions in 600mm, 900mm, 1200mm, 1500mm, 1800mm, 2000mm, 2500mm and 3000mm diameter.

	600 mm	900 mm	1200 mm	1500 mm	1800 mm	2000 mm	2500 mm	3000 mm
 IP20								
reference IN	45180	45181	45182	45183	45184	45185	45186	45187
reference OUT	45190	45191	45192	45193	45194	45195	45196	45197
LED wattage	34 W	51 W	68 W	81 W	102 W	116 W	141 W	170 W
power supply	24 V	24 V	24 V	24 V	24 V	24 V	24 V	24 V
	1550 	2100 	2750 	3400 	4100 	4750 	5450 	6550 





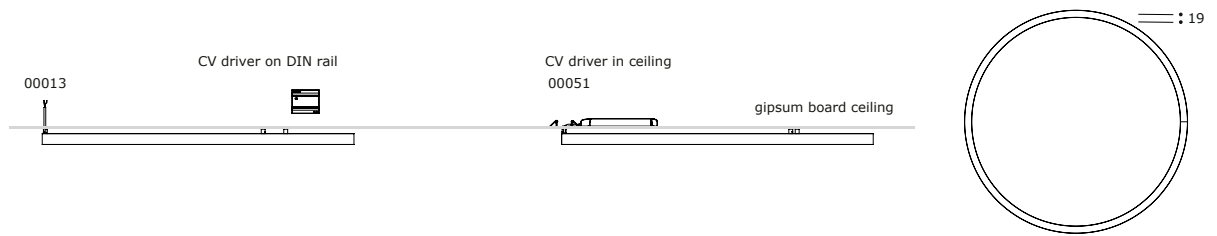


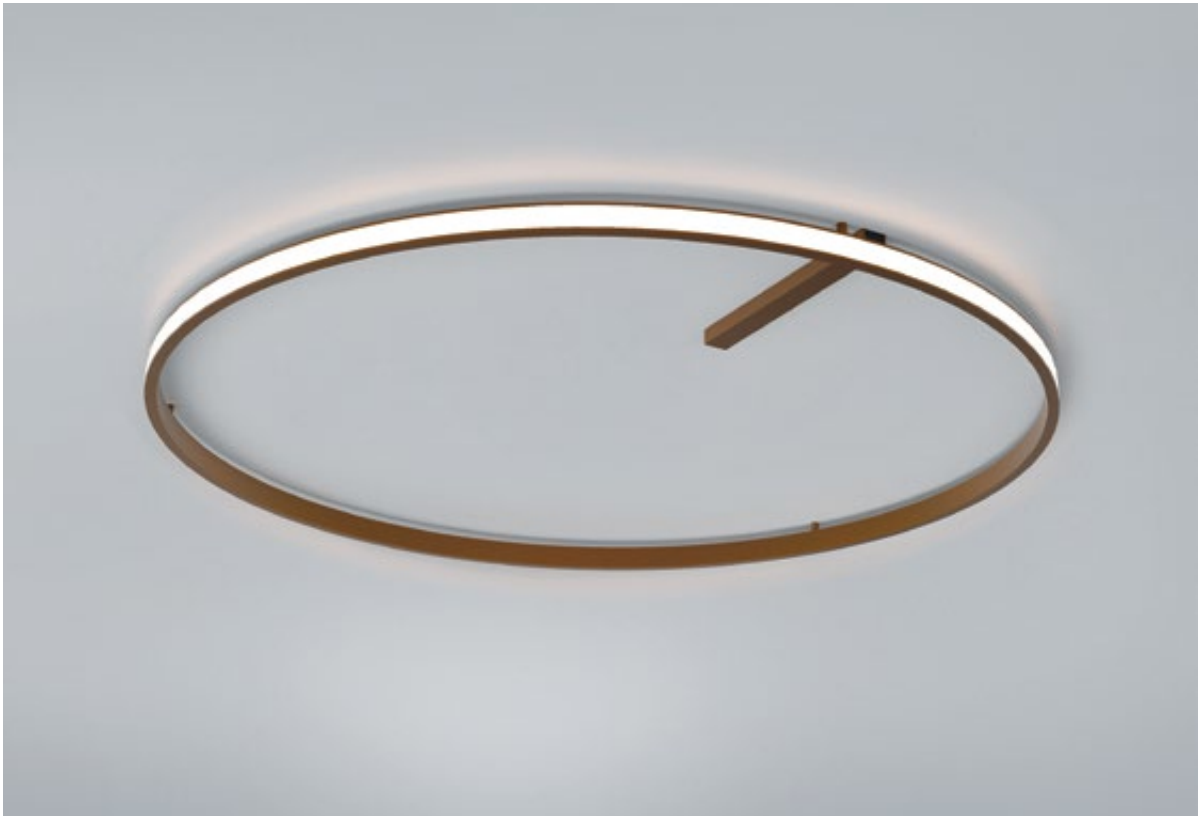
## OREOL SURFACE FEED RECESSED




## OREOL SURFACE ACCESSORIES

Feed recessed for gipsium board surface / suspended mounting




					
	• 90 •	• 83 •		• 52 •	
FEED recessed	COMBI 90 mm	recessed	trimless	remote CV driver	remote CV driver
reference	00052.xx	00051.xx	00050.xx	00013.xx	00113.xx
voltage	24-48 V	24-48 V	24-48 V	24-48 V	24-48 V




## OREOL SURFACE BASE



## OREOL SURFACE FEEDBOX



length	280 mm	330 mm	410 mm
reference	421711.xx	421722.xx	421733.xx
wattage	35 W	60 W	100 W



length	360 mm
reference	421744.xx
wattage	200 W

