



OREOL SUSPENSION




OREOL is available in 8 sizes and can be surface suspended or wall/ceiling mounted. It consists of circular aluminium profile and an acrylic diffuser for uniform illumination.

Integrated or remote control gear that can be fixed or touch/DALI dimmable. Can be ordered in IN or OUT versions in 600mm, 900mm, 1200mm, 1500mm, 1800mm, 2000mm, 2500mm and 3000mm diameter.






VIRGIN STUDIOS, Studio Rublek, Oreol Suspension Custom


			diameter	600 mm	900 mm	1200 mm	1500 mm	1800 mm	2000 mm	2500 mm	3000 mm
IP20			reference IN	45180	45181	45182	45183	45184	45185	45186	45187
			reference OUT	45190	45191	45192	45193	45194	45195	45196	45197
			LED wattage	34 W	51 W	68 W	81 W	102 W	116 W	141 W	170 W
LED strip			power supply	24 V	24 V	24 V	24 V	24 V	24 V	24 V	24 V
				1550 	2100 	2750 	3400 	4100 	4750 	5450 	6550 

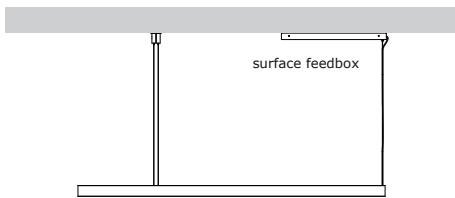

OREOL SUSPENSION FEEDBOX




length	280 mm	330 mm	410 mm
reference	42171.xx	42172.xx	42173.xx
wattage	35 W	60 W	100 W



length	360 mm
reference	42174.xx
wattage	200 W



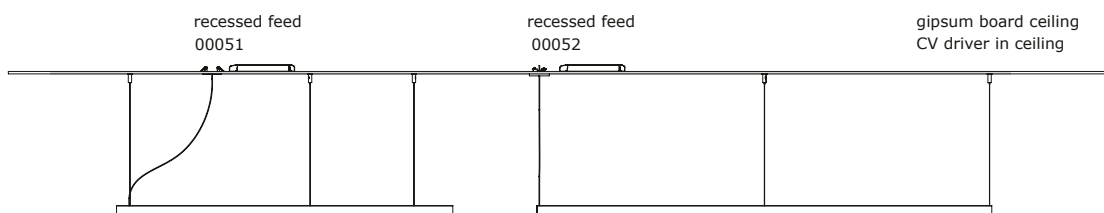

OREOL SUSPENSION ACCESSORIES

Feed recessed for gypsum board surface / suspended mounting

					
	• 90 •	• 83 •		• 52 •	
FEED recessed	COMBI 90 mm	recessed	trimless	remote CV driver	remote CV driver
reference	00052.xx	00051.xx	00050.xx	00013.xx	00113.xx
voltage	24-48 V	24-48 V	24-48 V	24-48 V	24-48 V

