


LELO SURFACE




LELO is available in 3 sizes and can be surface suspended or wall/ceiling mounted. It consists of circular aluminium profile and an acrylic diffuser for uniform illumination. Integrated or remote control gear that can be fixed or touch/ DALI dimmable. Can be ordered in DOWN or UP/DOWN versions in 900mm, 1200mm or 1500mm diameter.


LELO SURFACE BASE

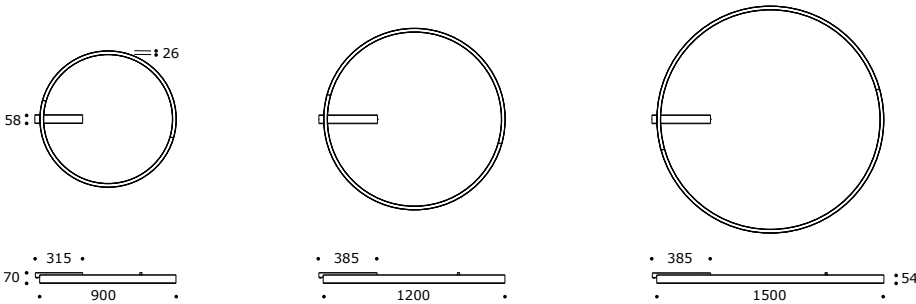

	900 mm	1200 mm	1500 mm
reference	42110HW/WW/W	42111HW/WW/W	42112HW/WW/W
reference DALI	42110DDHW/WW/W	42111DDHW/WW/W	42112DDHW/WW/W
wattage	58 W	70 W	92 W
 voltage	230 V	230 V	230 V
 K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
  CRI	95+	95+	95+
	3800 	5000 	6200 

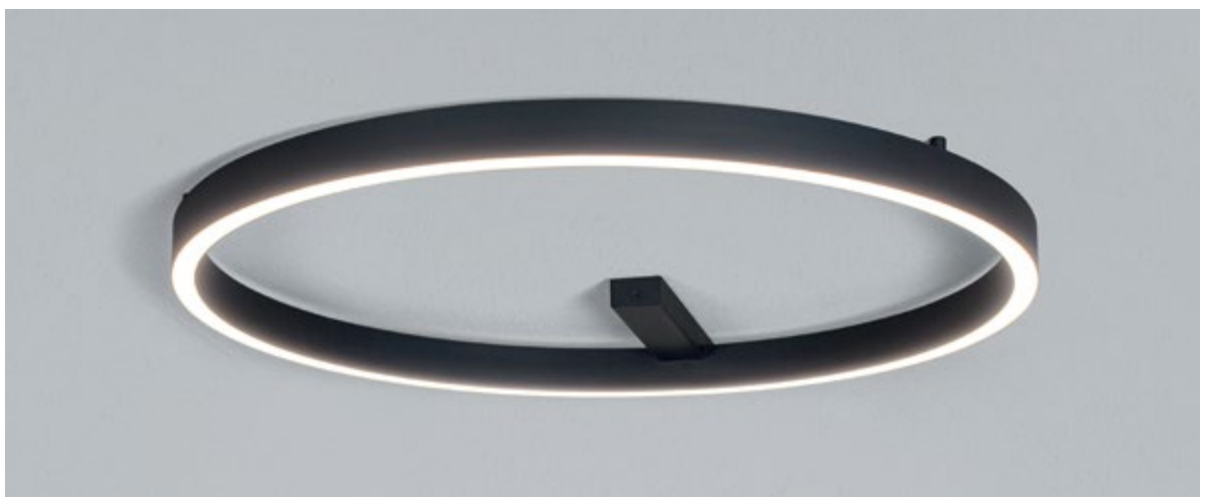

LELO SURFACE CEILING FIX

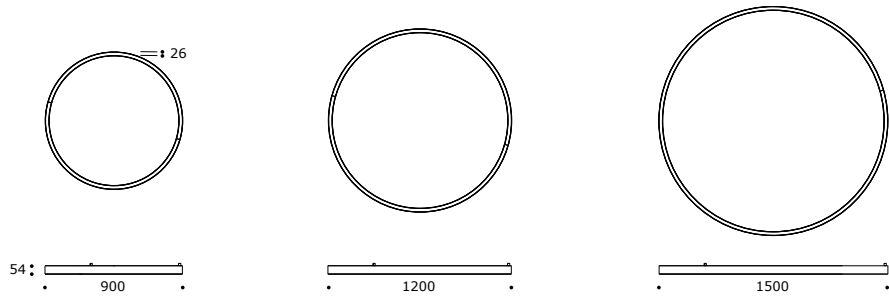

	900 mm	1200 mm	1500 mm
reference	42120HW/WW/W	42121HW/WW/W	42122HW/WW/W
wattage	58 W	70 W	92 W
voltage	24 V	24 V	24 V
K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
IP20	CRI	95+	95+
Gear to be ordered separately.			
	3100	4200	5300

LELO SURFACE ACCESSORIES



reference	00050	00051
Gear not included.		

