







LELO SURFACE




LELO is available in 3 sizes and can be surface suspended or wall/ceiling mounted. It consists of circular aluminium profile and an acrylic diffuser for uniform illumination. Integrated or remote control gear that can be fixed or touch/ DALI dimmable. Can be ordered in DOWN or UP/DOWN versions in 900mm, 1200mm or 1500mm diameter.




LELO SURFACE BASE



	900 mm	1200 mm	1500 mm
reference	42110HW/WW/W	42111HW/WW/W	42112HW/WW/W
reference DALI	42110DDHW/WW/W	42111DDHW/WW/W	42112DDHW/WW/W
wattage	58 W	70 W	92 W
voltage	230 V	230 V	230 V
K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
IP20	95+	95+	95+
CRI	95+	95+	95+
	3800	5000	6200

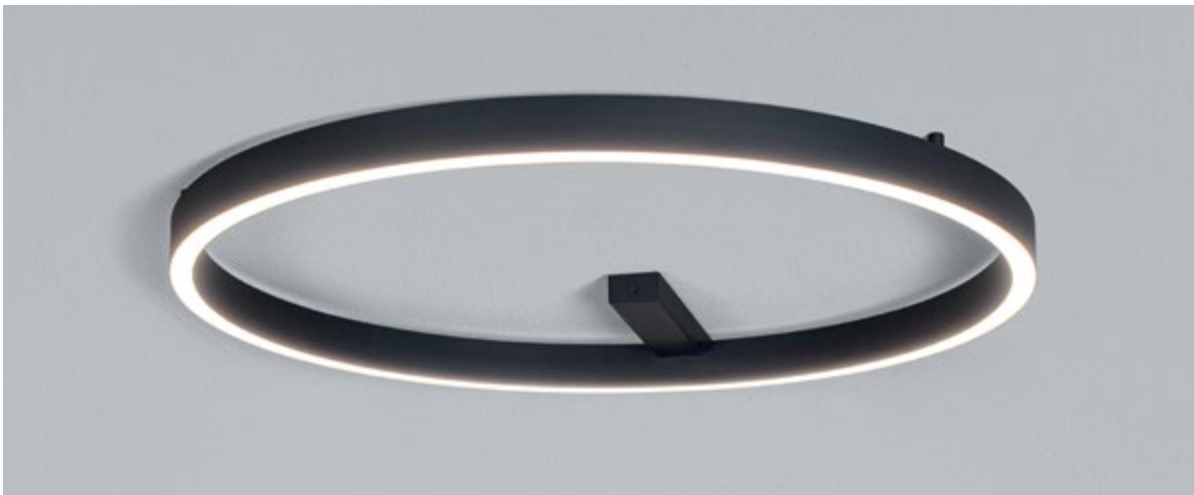

L E L O SURFACE CEILING FIX

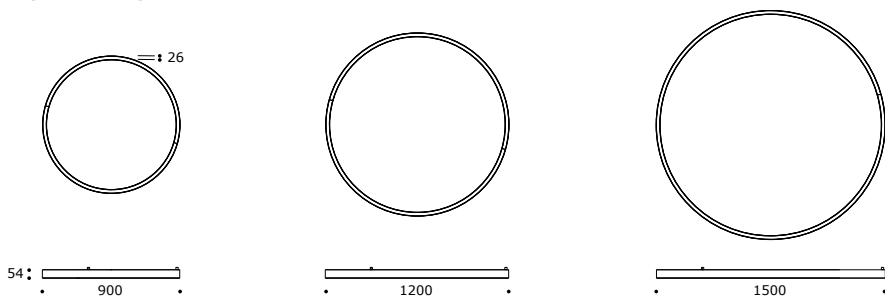

	900 mm	1200 mm	1500 mm
reference	42120HW/WW/W	42121HW/WW/W	42122HW/WW/W
wattage	58 W	70 W	92 W
voltage	24 V	24 V	24 V
K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
IP20 CRI	95+	95+	95+
Gear to be ordered separately.	3100	4200	5300

L E L O SURFACE ACCESSORIES


	recessed power feed TRIMLESS	recessed power feed
reference	00050	00051

Gear not included.

POWER FEED

FEED RECESSED

Strip | Stripmini | Stripminislim |
Lelo | Shu




3X

5X

reference 00014 00015

FEED RECESSED TRIMLESS

Strip | Stripmini | Stripminislim |
Lelo | Shu




5X

reference 00115

FEED EXTERNAL


Strip | Stripmini | Stripminislim |
Lelo | Shu



reference 00012

FEED COMBI


Strip | Stripmini | Stripminislim |
Lelo | Shu



5X

reference 00116


Strip | Stripmini | Stripminislim |
Lelo | Shu



3X


5X

reference 00016 00017




reference 00010

Lelo Feed




reference 00051

Lelo Feed



reference 00050



reference 00110

CODES

LIGHT SOURCE

HW - 2700K

WW - 3000K

W - 4000K